			_	UTAH OIL	. AND GAS COI	NSERVATION C	OIZZIMMC	١		
REMARKS:	WELL LOG	ELE	CTRIC LOG	FILE X	WATER SANDS	LOCAT	ON INS	D	SUB. REPORT/abd.	
970	226	cons.	exp:							
				,						
DATE FILED	_OC	TOBER_	7, <u>1996</u>							
LAND: FEE & P	ATENTED	STATE L	EASE NO.		<u></u> -	PUBLIC LEASE NO.			INDIAN #	
DRILLING APPR	OVED: OC		24, 1996						14-20-H62-3516	
SPUDDED IN:	<u> </u>	3 · 96								
COMPLETED:	1.3.4	77 Por	PUT TO PRODUC		- 10	- · · · ·				
INITIAL PRODU	ICTION: 4	2 BDL	20 mg	P 5 5	3BBL		,			
GRAVITY A.P.I.			<u>' </u>							
GOR:		. = .								
PRODUCING ZO		198-1	3446' 0,1	rV_						
TOTAL DEPTH:	<u> </u>	<u>'D'</u>								
WELL ELEVATION	ON:									
DATE ABANDO	NED:									
FIELD:	AN	<u>TELOPE</u>	CREEK							
UNIT:										
COUNTY		CHESNE								
WELL NO.			AL 21-06					<u>013-31</u>		
LOCATION	1980	FNL +	T. FROM (N) (S) LINE,	2180	FWL	FT FROM (E) (W)	LINE. NW	<u>SE</u>	1/4 - 1/4 SEC. 21	
										
TWP.	RGE	SEC.	OPERATOR			TWP	RGE	SEC.	OPERATOR	

DETROCLADA ODERATINO

QUATERNARY			
	Star Point	Chinle	Molas
Alluvium	Wahweap	Shinarump	Manning Canyon
Lake beds	Masuk	Moenkopi	Mississippian
Pleistocene	Colorado	Sinbad	Humbug
Lake beds	Sego	PERMIAN	Brazer
TERTIARY	Buck Tongue	Kaibab	Pilot Shale
Pliocene	Castlegate	Coconino	Madison
Salt Lake	Mancos	Cutler	Leadville
Oligocene	Upper	Hoskinnini	Redwall
Norwood	Middle	DeChelly	DEVONIAN
Eocene	Lower	White Rim	Upper
Duchesne River	Emery	Organ Rock	Middle
Uinta	Blue Gate	Cedar Mesa	Lower
Bridger	Ferron	Halgaite Tongue	Quray
Green River	Frontier	Phosphoria	Elbert
	Dakota	Park City	McCracken
	Burro Canyon	Rico (Goodridge)	Aneth
	Cedar Mountain	Supai	Simonson Dolomite
	Buckhorn	Wolfcamp	Sevy Dolomite
	JURASSIC	CARBON I FEROUS	North Point
Wasatch	Morrison	Pennsylvanian	SILURIAN
Stone Cabin	Salt Wash	Oquirrh	Laketown Dolomite
Colton	San Rafeal Gr.	Weber	ORDOVICIAN
Flagstaff	Summerville	Morgan	Eureka Quartzite
North Horn	Bluff Sandstone	Hermosa	Pogonip Limestone
Almy	Curtis		CAMBRIAN
Paleocene	Entrada	Pardox	Lynch
Current Creek	Moab Tongue	Ismay	Bowman
North Horn	Carmel	Desert Creek	Tapeats
CRETACEOUS	Glen Canyon Gr.	Akah	Ophir
Montana	Navajo	Barker Creek	Tintic
Mesaverde	Kayenta		PRE - CAMBRIAN
Price River	Wingate	Cane Creek	
Blackhawk	SSIC		
	AC ME VISIOLE	100730	

Form 3160-3 (November 1983) (formerly 9-331C)

UNITED STATES DEPARTMENT OF THE INTERIOR


SUBMIT IN TOTAL

(Other instructions on reverse side)

Form approved. Budget Bureau No. 1004-0136 Expires August 31, 1985

		OF LAND MANA				5.	14-20-H62		NO.
A DDL ICA						6	IF INDIAN, ALLOTT		
	TION FOR PERMIT	TO DRILL, I	DEEP	EN, OR PLU	IG BACI	<u>K</u> "			
1a. TYPE OF WORK	DRILL X	DEEPEN [7	DI LIC	BACK [7.	UTE INDIA		<u></u>
b. TYPE OF WELL	DRILL M	DEEFEIN		PLOG	DACK L	-			
WELL X	GAS WELL OTHER			NGLE 2	MULTIPLE C	<u> </u>	FARM OR LEASE N.	AMB	
2. NAME OF OPERA	TOR						UTE TRIBA	L	
PETROGLY	PH OPERATING C	O., INC.				9.	WELL NO.		
3. ADDRESS OF OPE	RATOR						#21-06		
P.O. BOX	607, ROOSEVEL	T, UTAH 84	4066			10	, FIELD AND POOL,	OR WILDCAT	
4. LOCATION OF WI At surface	LL (Report location clearly a	ind in accordance wit	th any 8	itate requirements.	*)		ANTELOPE		
	80' FNL & 2180	' FWL NW/S	E			111	AND SURVEY OR A	BLK. Lega	
At proposed pro	60. zone 664						GBG 21	mcc D	21.2
14. DISTANCE IN M	diles and direction from N	EAREST TOWN OR POS	T OFFIC	70		12	SEC. 21,		
	LES SOUTHWEST			_			JCHESNE	UTAH	
15. DISTANCE FROM	PROPOSED*	OF MITON,		OF ACRES IN LEA	ASE 17.		CRES ASSIGNED	TOTALL	
LOCATION TO N PROPERTY OR L	EASE LINE, PT.	0001	_	22 22		TO THIS	WELL 40		
18. DISTANCE FROM	est drig. unit line, if any) 1's representations.	980.		33.33 OPOSED DEPTH	20.	ROTARY (E CABLE TOOLS		
TO NEAREST W	ELL, DRILLING, COMPLETED, ON THIS LEASE, FT.		۱	137'	1 1	ROTA	ΥY		
21. ELEVATIONS (Sh	ow whether DF, RT, GR, etc.)		' 0	13/			22. APPROX. DATE W	ORK WILL ST.	ART*
6332.0'	GRADED GROUND					ł	SEPTEMBE	R, 199	6
23.		PROPOSED CASI	NG ANI	CEMENTING PR	OGRAM	· · · · · · · ·			
SIZE OF HOLE	BIZE OF CASING	WEIGHT PER F	оот	SETTING DEPT	ч		QUANTITY OF CEMI	CNT	
12 1/4	8 5/8	24.0#		250'		5 sx	class "G"		CaCl ₂
7 7/8	5 1/2	15.5#		6137'			/sx cello		
							OZMIX + 2		10%
	l	l			SAL	TO TO	400' ABO	VE ALL	ZONES
		er sala		ΛI			REST (+ 1		
•		VEIDEN		HL			EMENT (11		
	UUI			•			200' ABOV		
						EXCE	H WATER I	NIEKVAL	+) Cr
					٥/ د	EACE	33).		
PETROGLYPH	OPERATING CO.,	INC. WILL	, BE	THE DESIG	NATED				
OPERATOR O	F THE SUBJECT W	VELL UNDER	BONI	# 4556.		lU)	ECEI		7
						יאוו	170 CO 170 17	العديد	11
p.c.: Utal	h Division of C	Dil, Gas, a	nd N	Mining		- 111/// [7		//
Bur	eau of Indian A	Affairs, Fo	rt I	ouchesne,	Utah	100	OCT 0 🐠	1996	7
Ute	Tribe, Fort Du	cnesne, Ut	an			1 1	•		1
						1 1			
							OF OIL, GAS		;
IN ABOVE SPACE DE zone. If proposal	scribe proposed program: I is to drip or deepen direction	f proposal is to deep	en or p	lug back, give data	a on present	producti	ve zone and propos d true vertical depi	ed new produ	retive
preventer program,	if any.		- data o	n aubsurface locali	ions and the		d tide vertical dep		
24.	1 . X 11						_		
SIGNED	Cl 11 jobi_	TIT	AGI	ENT FOR PE	TROGLY	TPH	DATE 10	<u> 3 - 96</u>	
(This space for	r Federal or State office use)								
	43-013-31731	,							
PERMIT NO.	73-013-31131			ADPROVAL DATE				/	
	TOX Y but thus		4	Million &	no m	01.	IOL	× 191	•
APPROVED BY	APPROVAL, IN ANY:		LE A	MUMIN CA	- Jane	ميس	DATE		

T5S, R3W, U.S.B.&M.

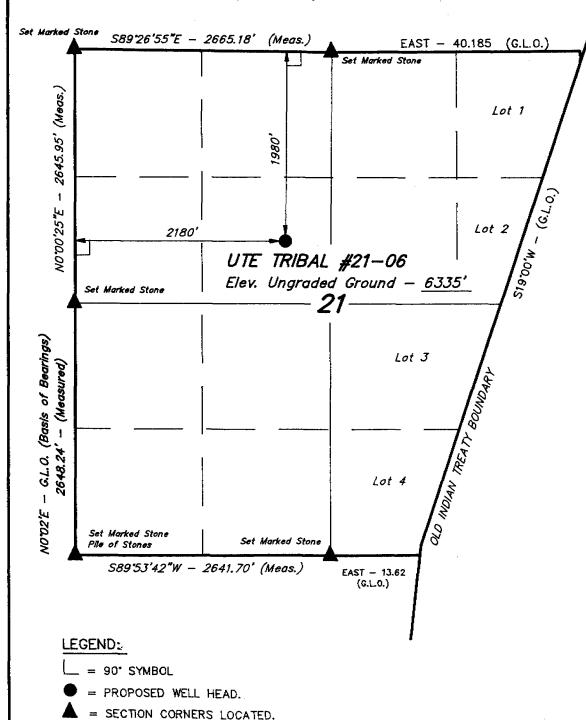


PETROGLYPH OPERATING CO., INC.

Well location, UTE TRIBAL #21-06, located as shown in the SE 1/4 NW 1/4 of Section 21, T5S, R3W, U.S.B.&M. Duchesne County, Utah.

BASIS OF ELEVATION

SPOT ELEVATION AT THE SOUTHWEST CORNER OF SECTION 17, T5S, R3W, U.S.B.&M. TAKEN FROM THE DUCHESNE SE QUADRANGLE, UTAH, DUCHESNE COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 6206 FEET.



CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE TAT WAS INTERACTOR FROM FIELD NOTES OF ACTUAL SURVEYS TABLE BY ME OR JUNGER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELLE

REGISTERED LAND SURVEYORE OF JUTAH

UINTAH ENGINEERING & LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078


(801) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: DATE DRAWN: 7-31-96 8-3-96						
PARTY G.S. J.K. C.B.T.	REFERENCES G.L.O. PL/	REFERENCES G.L.O. PLAT					
WEATHER	FILE						
WARM	PETROGLYPH OF	PETROGLYPH OPERATING CO., INC.					

Petroglyph Operating Co., Inc. P.O. Box 1839 Hutchinson, KS 67504-1839

October 3, 1996

Utah Division of Oil, Gas, & Mining Attn: Mr. Frank Matthews, Petroleum Engineer 1594 West North Temple Box 145801 Salt Lake City, UT 84114-5801



RE: APPLICATION FOR PERMIT TO DRILL UTE TRIBAL #21-06 SE/NW SEC. 21, T5S, R3W **DUCHESNE COUNTY, UTAH** LEASE NO. BIA 14-20-H62-3516 **UTE TRIBAL LANDS**

Dear Mr. Matthews:

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the referenced well.

Please address further communication regarding this matter (including approval) to:

Ed Trotter P.O. Box 1910 Vernal, UT 84078 Phone # (801) 789-4120 Fax # (801) 789-1420

Sincerel

Agent

Petroglyph Operating Co., Inc.

Attachments

/EHT/dmt

EIGHT POINT PLAN

UTE TRIBAL #21-06 SE/NW SEC. 21, T5S R3W DUCHESNE COUNTY, UTAH

1. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:

FORMATIONS	DEPTH	SUBSEA
Mahogany Shale	2916	3512
'X' marker	4478	2030
Douglas Creek	4618	1890
"B" Limestone	4988	1520
B/Castle Peak Limestone	5602	740
Basal Carbonate Limestone	6027	315
Total Depth	6137	205

Anticipated BHP

2600 psi

2. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS FORMATIONS:

Substance	Formation	Depth	<u>Subsea</u>
Oil/Gas	Douglas Creek	4618	1890
Oil/Gas	B/Castle Peak	5602	740
Other mineral zones	NI/A		

3. PRESSURE CONTROL EQUIPMENT: BOP Schematic Diagram attached.

4. <u>CASING PROGRAM</u>:

					MININ	<u>MUM SAFETY</u>	<u>FACTOR</u>	
HOLE SIZI	E INTERVAL	LENGTH	SIZE	WEIGHT	GRADE	COLLAPSE	BURST	TENSILE
12 1/4	0' - 250'	250'	8 5/8	24.0 #	J-55	1370 PSI	2950 PSI	263,000#
7 7/8	0' - 6137'	6137'	5 1/2	15.5 #	M-50	3650 PSI	4550 PSI	186.000#

All casing will be new or inspected.

EIGHT POINT PLAN

UTE TRIBAL #21-06 SE/NW SEC. 21, T5S R3W DUCHESNE COUNTY, UTAH

5. MUD PROGRAM

INTERVAL	MUD TYPE
0' - 250'	Air
250' - 4000'	Air/Mist & Aerated Water
4000' - TD	Air/3% KCL water or KCL substitute
TD	Gel/polyacrylamide plolymer w/5-10% LCM

Sufficient mud inventory will be maintained on location during drilling to handle any adverse conditions that may arise.

6. **VARIANCE REQUESTS:**

- A. Petroglyph Operating Co., Inc. requests a variance to regulations requiring a straight run blooie line.
- B. Petroglyph Operating Co., Inc. requests a variance to regulations requiring an automatic ignitor or continuous pilot light on the blooie line.

7. EVALUATION PROGRAM:

Logs:	Mud Logging	T.D. to base of surface csg.
	Compensated Density-Compensated Neutron Log	T.D. to base of surface csg.
	Dual Laterolog - Micro-SFL	T.D. to base of surface csg.
	Numar (Magnetic Resonance Imaging Log)	@ Geologists discretion

Cores: None Programmed DST': None Programmed

Completion: To be submitted at a later date.

8. **ABNORMAL CONDITIONS:**

None anticipated.

EIGHT POINT PLAN

UTE TRIBAL #21-06 SE/NW SEC. 21, T5S R3W DUCHESNE COUNTY, UTAH

9. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

10. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in associaton with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in associaton with the drilling of this well.


(Attachment: BOP Schematic Diagram)

2000 PSIG DIAGRAM

BOTH RAMS ARE 2000 PSIG RATED. CASING FLANGE IS 9" 2000 PSIG RATED. BOPE 9" 2000 PSIG

TESTING PROCEDURE:

- 1. BOPE 's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
- 2. Blind rams will be tested to rated working pressure, 2000 psig
- 3. Casing will be tested to 0.22 psi/ft. or 1500 psig. Not to exceed 70% of burst strength, whichever is greater.
- 4. All lines subject to well pressure will be pressure tested to the same pressure as blind & pipe rams.
- 5. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 2000 psig BOPE specifications.

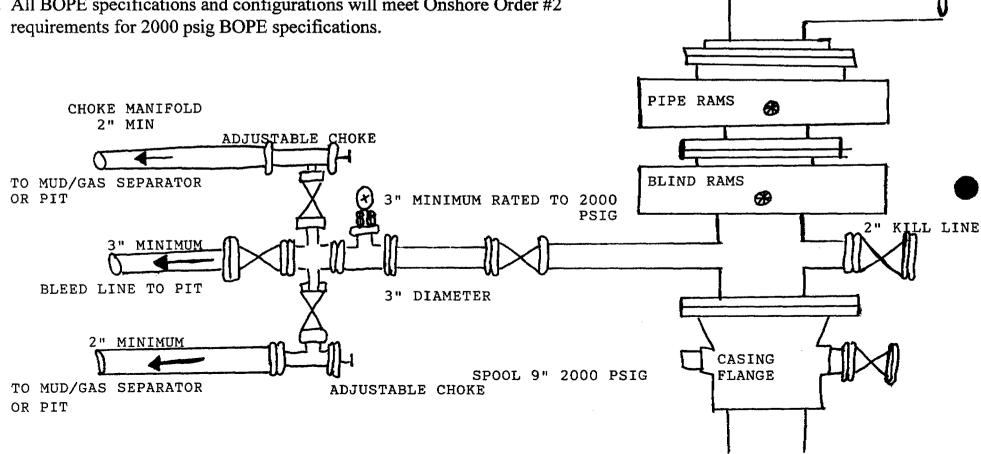

ROTATING

HEAD

FLOW LINE

CONDITIONS OF APPROVAL FOR THE SURFACE USE PROGRAM OF THE APPLICATION FOR PERMIT TO DRILL

Company/Operator: Petroglyph Operating Co., Inc.

Well Name & Number: <u>Ute Tribal #21-06</u> Lease Number: <u>BIA 14-20-H62-3516</u>

Location: 1980' FNL & 2180' FWL SE/NW, Sec. 21, T5S R3W

U.S.B.&M., Duchesne County, Utah

Surface Ownership: Ute Indian Tribe

NOTIFICATION REQUIREMENTS

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice

- at least twenty-four (24) hours prior to spudding the

well.

Casing String and

Cementing

- twenty-four (24) hours prior to running casing and

cementing all casing strings.

BOP and related

Equipment Tests

- twenty-four (24) hours prior to running casing and

tests.

First Production

Notice

- within five (5) business days after new well begins

or production resumes after well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice To Drill and Surface Use Program.

THIRTEEN POINT SURFACE USE PROGRAM

1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing road.
- B. The proposed well site is located approximately 21.8 miles southwest of Myton, Utah See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

2. PLANNED ACCESS ROAD

- A. The access road will be approximately 0.3 miles in length. See attached TOPO Map "B"
- B. The access road has a 30 foot ROW w/18 foot running surface.
- C. Maximum grade on access road will be 8%
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges or major cuts & fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

All travel will be confined to existing access road Right-of-Way. Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service Publication: Surface Operating Standards For Oil & Gas Exploration and Development, (1989).

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the

roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of- Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, Petroglyph Operating Co., Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION

- A. Water wells None
- B. Abandoned wells None
- C. Temporarily abandoned wells None.
- D. Disposal wells None.
- E. Drilling wells None.
- F. Producing wells 7*
- G. Shut in wells None
- H. Injection wells None
 (*See attached TOPO map "C" for location)

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

A. ON WELL PAD

- 1. Tank batteries None
- 2. Production facilities-To be submitted later
- 3. Oil gathering lines None

- 4. Gas gathering lines-None
- 5. Injection lines None
- 6. Disposal lines None
- 7. Surface pits None

B. OFF WELL PAD

- 1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
- 2. A 4 1/2" OD steel above ground production pipeline will be laid approximately 800' from proposed location to a point in the SW/NW of Section 21, T5S, R3W, where it will tie into Petroglyph Operating Co., Inc.'s existing facility at the Ute Tribal #21-05 tank battery. Proposed pipeline crosses Ute Tribe lands, thus a Right-of-Way grant will be required. See attached TOPO Map D showing pipeline route.
- 3. Proposed pipeline will be a 4 1/2" OD steel, welded line laid on the surface.
- 4. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery, unless more stringent protective requirements are deemed necessary by the authorized officer.

The production facilities will be placed on the South side of the location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities required will be painted within 6 months of installation. Facilities required to comply with O.S.H.A.

(Occupational Safety and Health Act) will be excluded. The required paint color is Desert Brown.

5. LOCATION & TYPE OF WATER SUPPLY

- A. Water supply will be from Target Trucking's Roosevelt Brine Storage and/or Target's water source in SE 1/4, Sec. 1, T 4S, R 5W Duchesne County, Utah (State water right #43-10152). All water will come from a non-depletable source.
- B. Water will be hauled by Target Trucking.
- C. No water well will be drilled on lease.

6. SOURCE OF CONSTRUCTION MATERIAL

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of location.
- B. All construction material will come from Ute Tribal Land.
- C. No mineral materials will be required.

7. METHODS OF HANDLING WASTE DISPOSAL

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at an approved waste disposal facility.
- 4. Produced waste water will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. During the 90 day period, an application for approval of a permanent disposal method and location, together with the required water analysis, will be submitted for the AO's approval.

- 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on drilling rig to avoid leakage of oil to pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in reserve pit or be removed and disposed of at an authorized disposal site.
 Introduction of well bore hydrocarbons to reserve pit will be avoided by flaring them off in flare pit at time of recovery.

Burning of trash will not be allowed. All trash must be contained in a trash cage and hauled away to an approved disposal site at the completion of the drilling activities.

On BIA administered land:

All reserve pits will be lined with either native clay, commercial bentonite or plastic sufficient to prevent seepage. (If a plastic nylon reinforced liner is used, it shall be torn and perforated after the pit dries and before backfilling of the reserve pit).

A 12 mill liner shall be installed in the reserve pit.

To protect the environment:

If the reserve pit is lined the operator will provide the BIA with a chemical analysis of the fluids in that pit no later than 90 days after the well completion to determine the method for final reclamation of the reserve pit. If the elemental concentrations shown by the chemical analysis exceeds the requirements described by part II, Standards of Quality for Waters of the State, Wastewater Disposal Regulations, State of Utah Division of Health, the contents and liner will be removed and disposed of at an authorized disposal site.

To protect the environment (without a chemical analysis) reserve pits will be constructed so as not to leak, break, or allow discharge of liquids.

Storage tanks will be used if drill sites are located on tribal

irrigable land, flood plains, or on lands under crop production. After first production, produced waste water will be confined to a lined pit or storage tank for a period not to exceed ninety (90) days. During the 90 day period, in accordance with NTL-2B, an application for approval of a permanent disposal method and location, along with required water analysis, shall be submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance.

8. ANCILLARY FACILITIES

A. No airstrips or camps are planned for this well.

9. WELL SITE LAYOUT

- A. Refer to attached well site plat for related topography cuts and fills & cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation parking areas, and access road.

The stockpiled topsoil will be stored on the North end.

The reserve pit will be located on the Northwest side of the location. The flare pit will be located downwind of the prevailing wind direction on the Northwest side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

Access to the well pad will be from the South.

N/A Diversion ditch(es) shall be constructed on the _______
side of the location (above/below) the cut slope, draining to
the _______

N/A Soil compacted earthen berm(s) shall be placed on the _______
side(s) of the location between the _______

N/A The drainage(s) shall be diverted around the sides of the well pad location.

N/A The reserve pit and/or pad locations shall be constructed long and narrow for topographic reasons ________

X Corner No. 8 will be rounded off to minimize excavation.

FENCING REQUIREMENTS

All pits will be fenced according to the following minimum standards:

- A. 39 inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16'.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BIA or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly travelled. If the well is a producer, the cattleguards (shall/shall not) be permanently mounted on concrete bases. Prior to a new road, crossing any fence located on federal land, or any fence between federal land and private land, the operator will contact the BIA, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to

satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RESTORATION OF SURFACE

A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 120 days from the date of well completion (weather permitting). Before any dirt work takes place, the reserve pit will be completely dry and all cans, barrels, pipe, fluid, and hydrocarbons, will be removed.

Contact appropriate surface management agency for required seed mixture.

B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and BIA will attach the appropriate surface rehabilitation conditions of approval.

ON BIA Administered lands:

Abandoned well sites, roads, or other disturbed areas will be restored to near their original condition. This procedure will include: (a) reestablishing irrigation systems where applicable, (b) reestablishing soil conditions in irrigated fields in such a way as to ensure cultivation and harvesting of crops and, (c) ensuring revegetation of the disturbed areas to the specifications of the Ute Indian Tribe or the BIA at the time of abandonment.

11. SURFACE OWNERSHIP

Access road:

Ute Indian Tribe

Location:

Ute Indian Tribe

12. OTHER INFORMATION

A. Petroglyph Operating Co., Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

-whether the materials appear eligible for the National Register of historic Places;

the mitigation measures the operator will likely have to undertake before the site can be used.

-a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

B. As operator, Petroglyph Operating Co., Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BIA,

or the appropriate County Extension Office. On BIA administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.

C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on Tribal Lands after the conclusion of drilling operations or at any other time without BIA authorization. However, if BIA authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

On BIA administered land:

Operator's employees, including subcontractors, will not gather firewood along roads constructed by operators. If wood cutting is required, a permit will be obtained from the Forestry Department of the BIA pursuant to 25 CFR 169.13 "Assessed Damages Incident to Right-of-Way authorization". All operators, subcontractors, vendors, and their employees or agents may not disturb saleable timber (including firewood) without a duly granted wood permit from the BIA Forester.

If the surface rights are owned by the Ute Indian Tribe and mineral rights are owned by another entity, an approved right-of-way will be obtained from the BIA before the operator begins any construction activities. If the surface is owned by another entity and the mineral rights are owned by the Ute Indian Tribe, rights-of-way will be obtained from the other entity.

All roads constructed by operators on the Uintah and Ouray Indian Reservation will have appropriate signs. Signs will be neat and of sound construction. They will state: (a) that the land is owned by the Ute Indian Tribe, (b) the name of the operator, (c) that firearms are prohibited to all non-Ute Tribal members (d) that permits must be obtained from the BIA before cutting firewood or other timber products, and (e) only authorized personnel permitted. All well site locations on the Uintah and Ouray Indian Reservation will have an appropriate sign indicating the name of the operator,

the lease serial number, the well name and number, the survey description of the well (either footage or the quarter-quarter section, the section, township, and range).

Additi	onal Surface Stipulations								
N/A	No construction or drilling activities shall be conducted between								
	and be	cause of							
N/A	_No surface occupancy will be allowed grouse strutting ground.	l within 1,000 feet of any sage							
N/A_	_No construction or exploration activit	ies are permitted within 1.5							
	mile radius of sage grouse strutting gr	ounds from April 1 to June 30.							
N/A	_There shall be no surface disturbance	within 600 feet of live water							
	(includes stock tanks, springs, and gu	zzlers).							
N/A	_No cottonwood trees will be removed	or damaged.							
N/A	_Pond will be constructed according to	BLM specifications							
	approximatelyft	-							
	on onsite.	, 55							
LESSI	EE'S OR OPERATOR'S REPRESENT	ATIVE AND CERTIFICATION							
	PERMITTING	OPERATIONS							
	Ed Trotter	Deanna Bell							
	1620 West 750 North	P.O. Box 607							
	Vernal UT 84078	Roosevelt, UT 84066							
	Telephone # (801)789-4120	(801) 722-2531							
		\/ · 							

Fax # (801) 789-1420

All lease/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. Petroglyph Operating Co., Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

Fax # (801) 722-9145


A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.


The BIA Office shall be notified upon site completion prior to moving on the drilling rig.

Certification:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in the Plan are to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Petroglyph Operating Co., Inc. and its contractors and sub-contractors in conformity with this Plan and the terms and conditions under which it is approved.

Jel foth

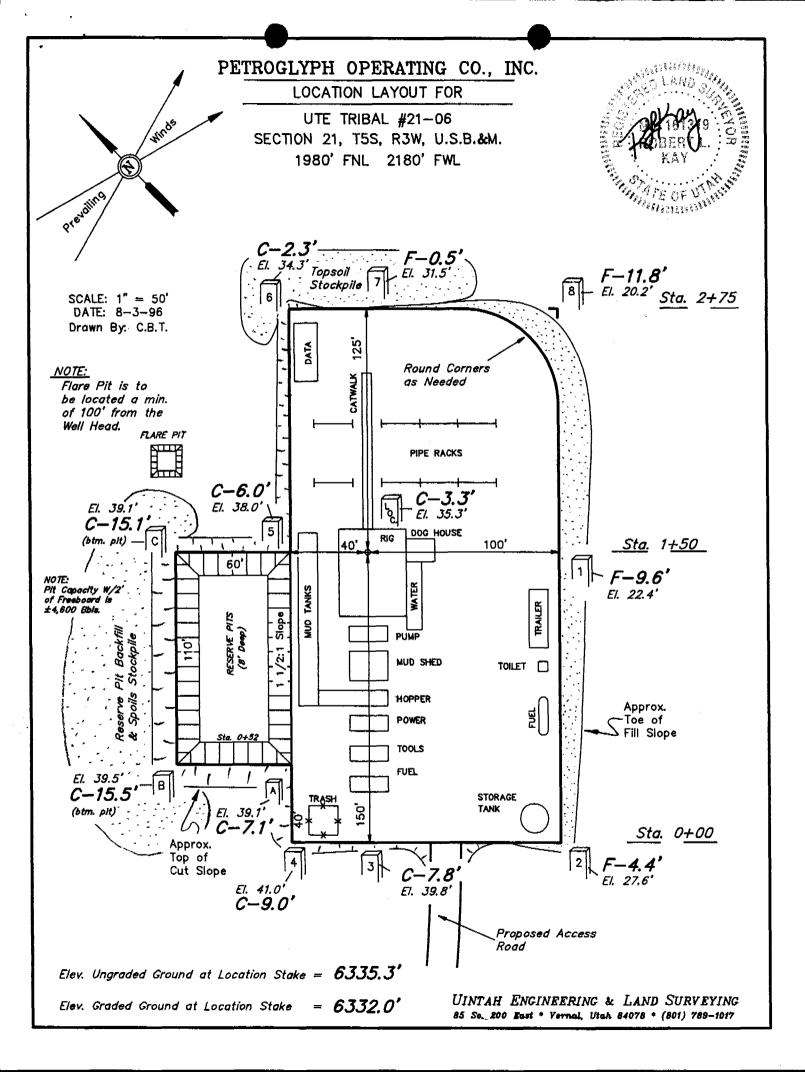

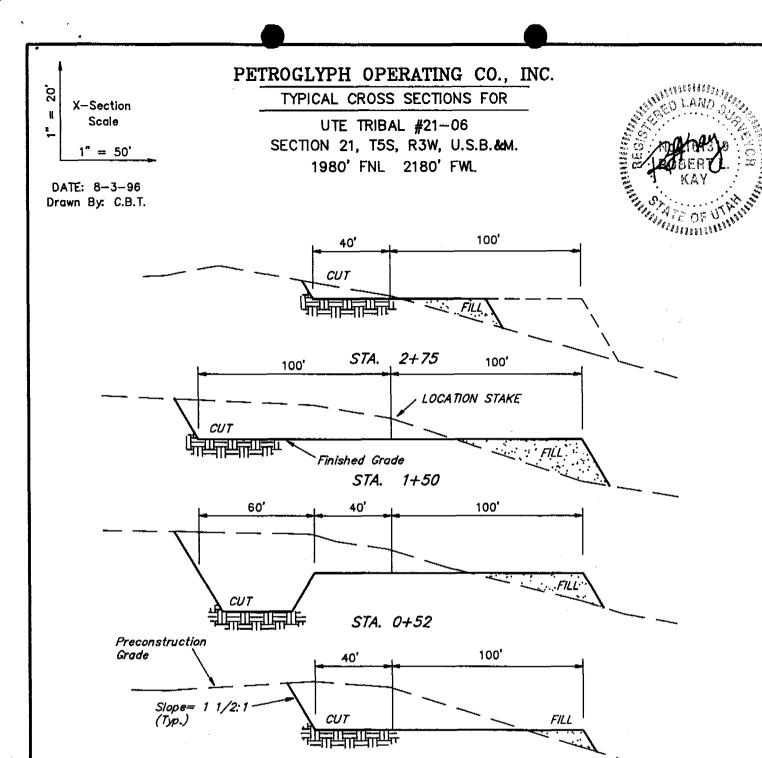

STA. 0+00

NOTE:

Topsoil should not be Stripped Below Finished Grade on Substructure Area.

APPROXIMATE YARDAGES

(12") Topsoil Stripping = 1,670 Cu. Yds.

Remaining Location = 5,510 Cu. Yds.

> TOTAL CUT 7,180 CU.YDS.

FILL = 4,570 CU.YDS. Topsoil & Pit Backfill

EXCESS MATERIAL AFTER


5% COMPACTION = 2,370 Cu. Yds. = 2,370 Cu. Yds.


(1/2 Pit Vol.)

EXCESS UNBALANCE O Cu. Yds.

(After Rehabilitation)

UINTAH ENGINEERING & LAND SURVEYING 86 So. 200 East * Vernal, Utah 84078 * (801) 789-1017

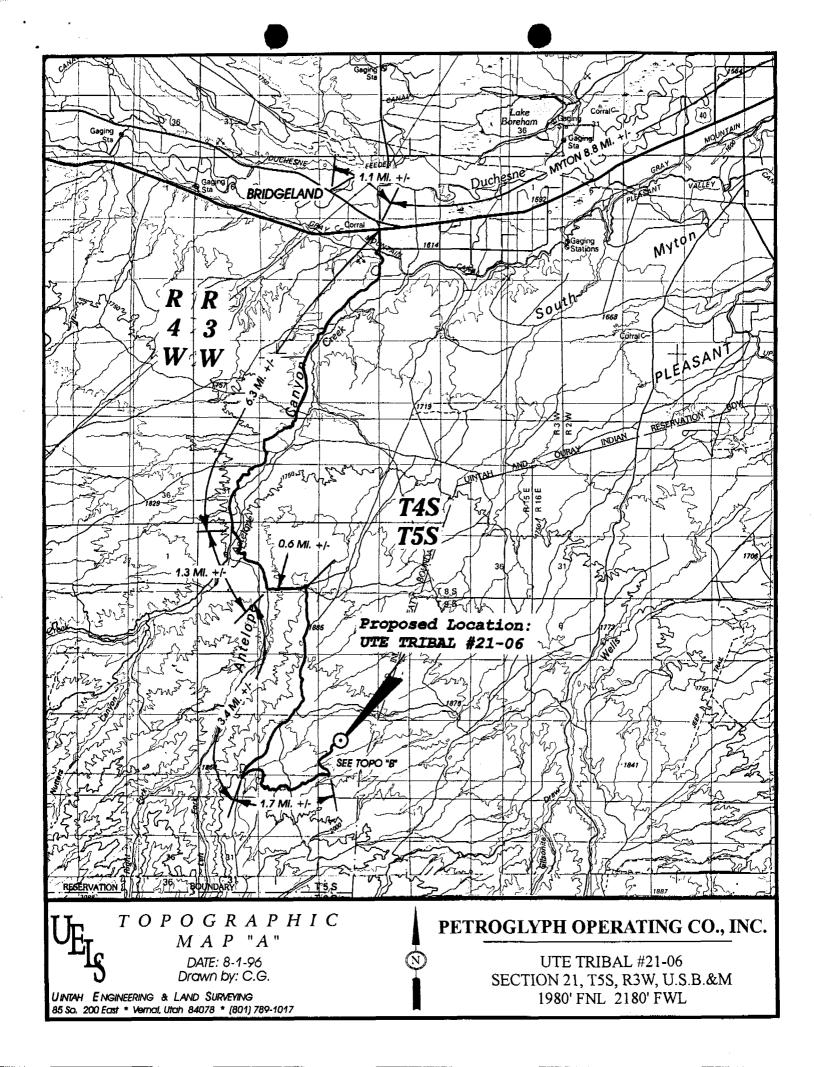

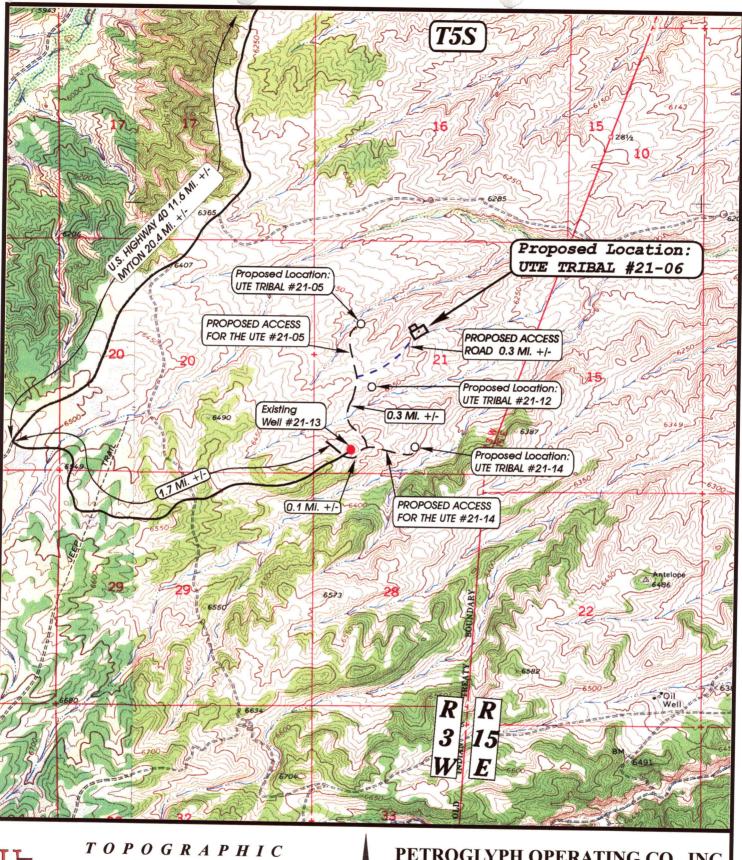



M A P "B"

DATE: 8-1-96 Drawn by: D.COX


UINTAH ENGINEERING & LAND SURVEYING 85 So. 200 East * Vernal, Utah 84078 * (801) 789-1017



PETROGLYPH OPERATING CO., INC.

UTE TRIBAL #21-06 SECTION 21, T5S, R3W, U.S.B.&M. 1980' FNL 2180' FWL

SCALE: 1" = 2000'

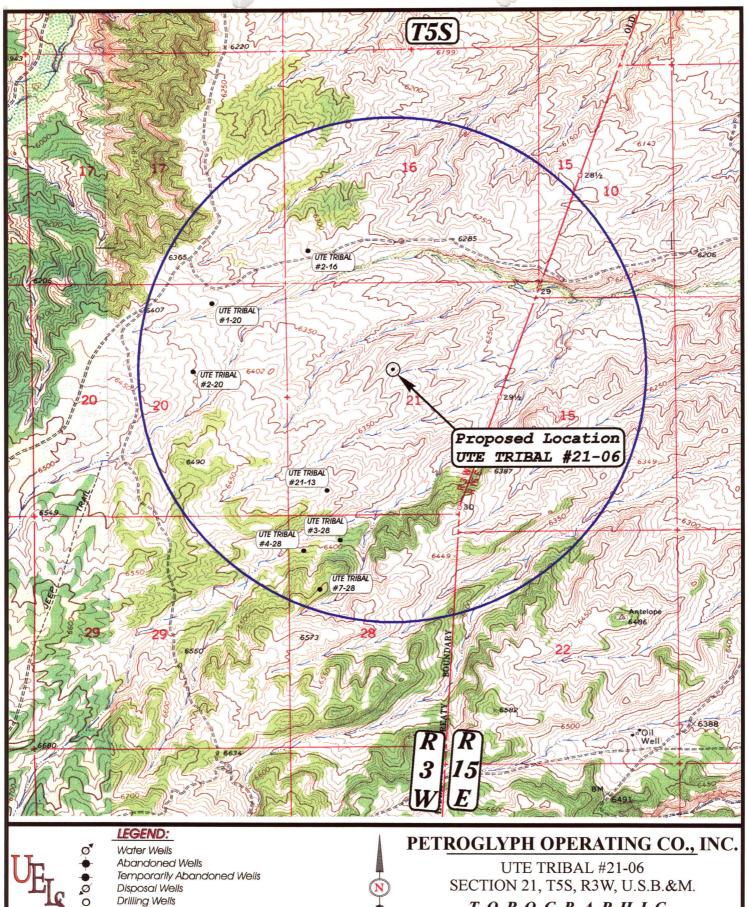


SCALE: 1" = 2000'

- **Producing Wells**
- Shut-in Wells

UINTAH ENGINEERING & LAND SURVEYING 85 So. 200 East * Vernal, Utah 84078 * (801) 789-1017

TOPOGRAPHIC M A P " C "

DATE: 8-1-96 Drawn by: D.COX

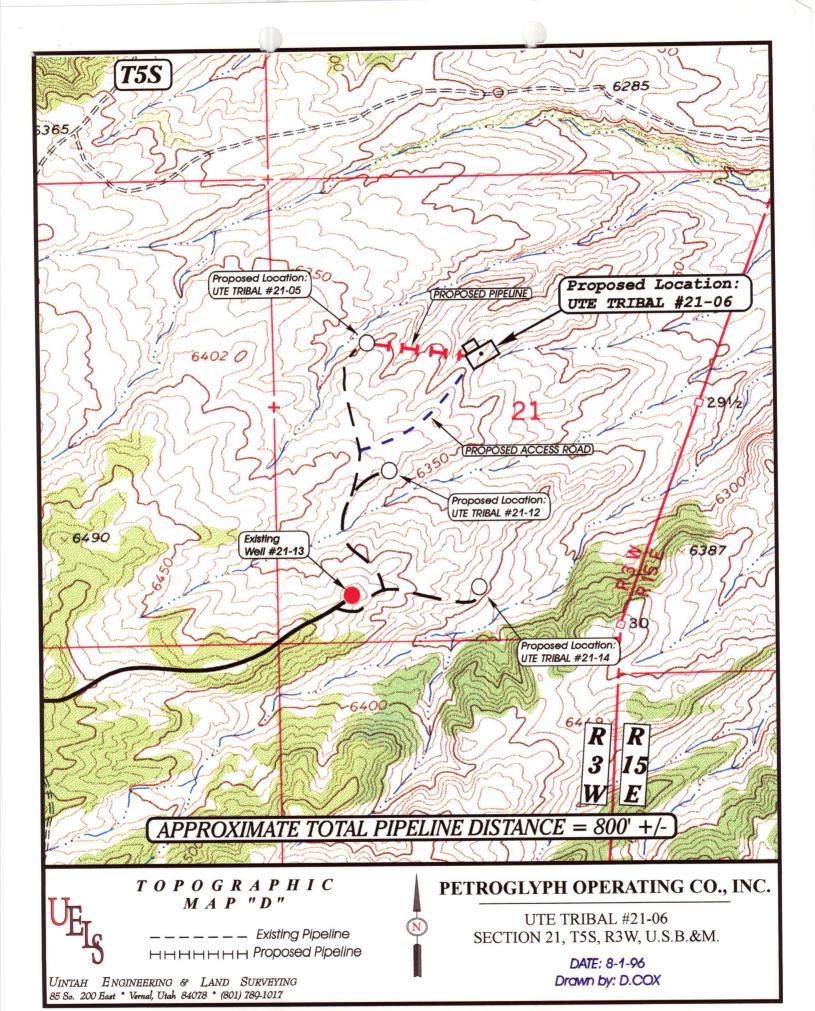

WORKSHEET APPLICATION FOR PERMIT TO DRILL

API NO. ASSIGNED: 43-013-31731 APD RECEIVED: 10/07/96 WELL NAME: UTE TRIBAL 21-06 OPERATOR: PETROGLYPH OPERATING (N3800) INSPECT LOCATION BY: / / PROPOSED LOCATION: SENW 21 - T05S - R03W TECH REVIEW Initials SURFACE: 1980-FNL-2180-FWL Date BOTTOM: 1980-FNL-2180-FWL DUCHESNE COUNTY Engineering ANTELOPE CREEK FIELD (060) Geology LEASE TYPE: IND Surface LEASE NUMBER: 14-20-H62-3516 PROPOSED PRODUCING FORMATION: GRRV RECEIVED AND/OR REVIEWED: LOCATION AND SITING: ___ R649-2-3. Unit: _____ ✓ Plat Bond: Federal[Y State[] Fee[] √ R649-3-2. General. (Number <u>Bo 4556</u>) N Potash (Y/N)**∥** Oil shale (Y/N) ___ R649-3-3. Exception. ✓ Water permit | Number <u>43 -16152</u> | Number <u>13 -16152</u> | Number (Y/N) | (Date: _____) Drilling Unit. Board Cause no: ____ Date: ____ COMMENTS: STIPULATIONS:


OPERATOR: PETROGLYPH

FIELD: ANTELOPE CREEK (060)

SEC. TWP. RNG: 21 T5S R3W

COUNTY: DUCHESNE

UAC: R649-3-2

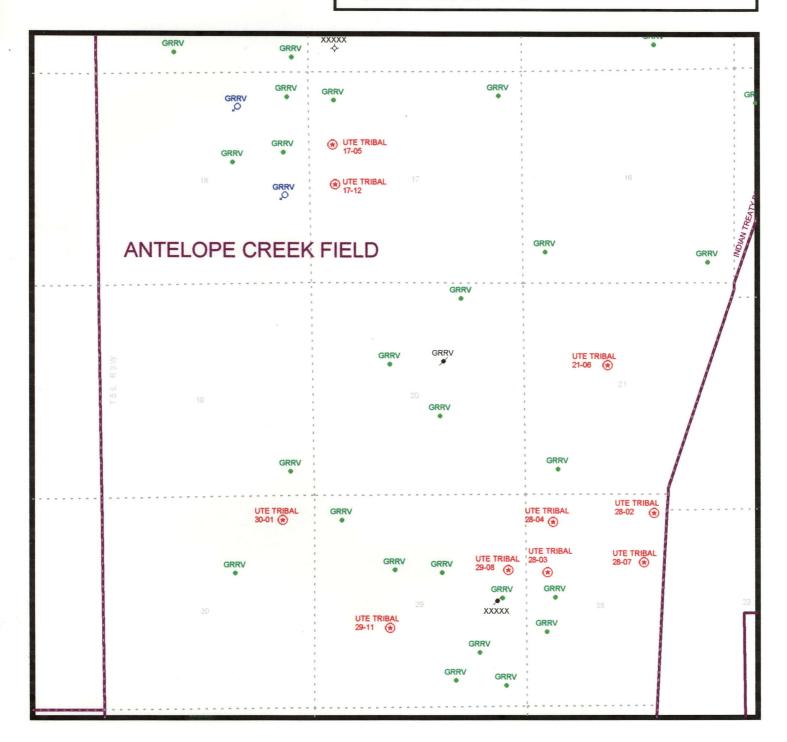

PREPARED:

DATE: 10-OCT-96

STATE OF UTAH, DIV OF OIL, GAS & MINERALS

Operator: PETROGLYPH OPERATING | Well Name: UTE TRIBAL 21-06

Project ID: 43-013-31731 | Location: SEC. 21 - T5S - R03W

<u>Design Parameters:</u>		<u>Design Factors:</u>			
Mud weight (8.90 ppg) : 0.462	psi/ft	Collapse	:	1.125	
Shut in surface pressure : 2437	psi	Burst	:	1.00	
Internal gradient (burst) : 0.065	psi/ft	8 Round	:	1.80	(J)
Annular gradient (burst) : 0.000	psi/ft	Buttress	:	1.60	(J)
Tensile load is determined using ai	r weight	Other	1	1.50	(J)
Service rating is "Sweet"		Body Yield	:	1.50	(B)

,	Length (feet)		Weight (lb/ft)		e Join		Depth (feet)	Drift (in.)	Cost
1	6,137	5.500	15.50	M -5() LT&(C	6,137	4.820	
	Load (psi)	Collapse Strgth (psi)			Min Int Strgth (psi)			Tension Strgth (kips)	i
1	2837	3650	1.287	2837	4550	1.60	95.12	2 186	1.96 J

Prepared by : MATTHEWS, Salt Lake City, Utah

Date

: 10-24-1996

Remarks

. _- -

GREEN RIVER

Minimum segment length for the 6,137 foot well is 1,500 feet.

SICP is based on the ideal gas law, a gas gravity of 0.69, and a mean gas

temperature of 115°F (Surface 74°F , BHT 160°F & temp. gradient 1.400°/100 ft.)

String type: Production

The mud gradient and bottom hole pressures (for burst) are $0.462~\mathrm{psi/ft}$ and $2.837~\mathrm{psi}$, respectively.

NOTE:

The design factors used in this casing string design are as shown above. As a general guideline, Lone Star Steel recommends using minimum design factors of 1.125 - collapse (with evacuated casing), 1.0 - (uniaxial) burst, 1.8 - API 8rd tension, 1.6 - buttress tension, 1.5 - body yield tension, and 1.6 - EUE 8rd tension. Collapse strength under axial tension was calculated based on the Westcott, Dunlop and Kemler curve. Engineering responsibility for use of this design will be that of the purchaser.

Costs for this design are based on a 1987 pricing model. (Version 1.07)



DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt Ted Stewart Executive Director

355 West North Temple 3 Triad Center, Suite 350 Salt Lake City, Utah 84180-1203 801-538-5340 James W. Carter 801-359-3940 (Fax)
Division Director 801-538-5319 (TDD) 801-359-3940 (Fax)

October 24, 1996

Petroglyph Operating Company, Inc. P.O. Box 607 Roosevelt, Utah 84066

Ute Tribal 21-06 Well, 1980' FNL, 2180' FWL, NW SE, Sec. 21, Re: T. 5 S., R. 3 W., Duchesne County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. 40-6-1 et seq., Utah Administrative Code R649-3-1 et seq., and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. API identification number assigned to this well is 43-013-31731.

Sincerely,

Associate Director

lwp

Enclosures

Duchesne County Assessor

Bureau of Land Management, Vernal District Office



Operator:	· · ·	Petro	<u>qlyph</u>	<u>Operating</u>	Com	oany,	Inc.		
Well Name & N	umber: _	Ute Tribal 21-06							
API Number:		43-01	3-3173	1			70.71	_	
Lease: 14-20-H62-3516									
Location:	NW SE	Sec.	21	T. 5	S	R	зω		

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for Permit to Drill.

2. Notification Requirements

Notify the Division within 24 hours following spudding the well or commencing drilling operations. Contact Jimmie Thompson at (801)538-5336.

Notify the Division prior to commencing operations to plug and abandon the well. Contact Frank Matthews at (801)538-5334 or Mike Hebertson at (801)538-5333.

3. Reporting Requirements

All required reports, forms and submittals shall be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

Form £160-3 (November 1983) (formerly 9-331C)

DEPARTMENT OF THE INTERIOR

SUBMIT IN THE LICATE OF COTH OF COTH

Form approved. Budget Bureau No. 1004-0136 Expires August 31, 1985

BUREAU OF LAND MANAGEMENT						14-20-H62-3516			
APPLICATIO	N FOR PERMIT	TO DRILL, [DEEPE	N, OR P	LUG B	ACK	6. IF INDIAN, ALLOTTED OR TRIBE NAME		
1a. TYPE OF WORK	RILL X	DEEPEN [JG BAC		UTE INDIAN TRIBE 7. UNIT AGREEMENT NAME		
	VELL OTHER		811 20	NGLE	MULTIPI ZONE	· = 🗀	S. FARM OR LEASE NAME		
2. NAME OF OPERATOR					-		UTE TRIBAL		
PETROGLYPH 3. ADDRESS OF OPERATOR	OPERATING CO	., INC.		<u>. </u>			9. WELL NO.		
		******* O	.066				#21-06 10. FIELD AND POOL, OR WILDCAT		
4. LOCATION OF WELL (I	7. ROOSEVELT Report location clearly and	, UTAH 84 I in accordance wit	bany S	tate requiremen	nts.*)	· · · · · · · · · · · · · · · · · · ·	ANTELOPE CREEK		
At surface	FNL & 2180'	FWL NW/SF	?				11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA		
At proposed prod. zo		- · · · · · · · · · · · · · · · · · · ·					AND SURVEY OK AREA		
							SEC. 21, T5S, R3W		
	AND DIRECTION FROM NEA			•			12. COUNTY OR PARISH 13. STATE		
22.8 MILES	S SOUTHWEST O	F MYTON, L		OF ACRES IN	LEASE		DUCHESNE UTAH		
LOCATION TO NEARES	T	80'					THIS WELL 40		
18. DISTANCE FROM PROP TO NEAREST WELL	COSED LOCATION*			POSED DEPTH			TARY OR CABLE TOOLS		
OR APPLIED FOR, ON TE	HIS LEASE, PT.	ļ	61	137'		ROT	OTARY		
	nether DF, RT, GR, etc.)				<u>.</u>		22. APPROX. DATE WORK WILL START*		
6332.0' GR.	ADED GROUND	<u> </u>					SEPTEMBER, 1996		
		PROPOSED CASI	NG AND	CEMENTING	PROGRAM				
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FO	TOO	SETTING D			QUANTITY OF CEMBRY		
12 1/4	8 5/8	24.0#		<u>250'</u>			x class "G" + 2% CaC1		
7 7/8	5 1/2	15.5#		<u>6137'</u>			#/sx celloflake. POZMIX + 2% GEL + 10		
	l		1)] (OF INT LIGHT LCM TO OR FRI	TO 400' ABOVE ALL ZON TEREST (+ 10% EXCESS) CEMENT (11 PPG <u>+</u>) + O 200' ABOVE OIL SHAI ESH WATER INTERVALS (CESS).		
PERATOR OF T C.: Utah D Bureau	ERATING CO., HE SUBJECT WE ivision of Oi of Indian Af ibe, Fort Duc	LL UNDER 1, Gas, a fairs, Fo	BOND nd M rt D	# 4556 ining	•		NOV 1 2 1996		
N ABOVE SPACE DESCRIBE one. If proposal is to reventer program, if an 4.	e PROFOSED PROGRAM: If drill or deepen directions y.	proposal is to deepedily, give pertinent	en or plo data on	ug back, give d subsurface loc	lata on precations and	Besserie	and thus Abies WIMNG! e blowout		
SIGNED Z.	1 woth		AGE	NT FOR	PETRO	SLYPH	DATE 10-3-96		
(This space for Fede	ral or State office use)				<u></u>				
PERMIT NO.	-21			PPROVAL DATE					
11		P	— Asś	istant Field	Manage	r			
APPROVED BY	Leaven	TITI	·» ——	Aineral Reso	ources		OCT 2.5 1996 ·		
CONDITIONS OF APPROV	E OF APPROV	AL			C	ONDITION Ti	NS OF APPROVAL ATTACHED O OPERATOR'S COPY		



DATE:

EPLY TO

Superintendent. Uintah & Ouray Agency

DEC

SUBJECT:

TO:

Concurrence Letter for Petroglyph Operating Company Corp.

OCT 23 1996

Bureau of Land Management. Vernal District Office

Attention: Minerals and Mining Division

We recommend approval of the Application to Permit to Drill on the following wells:

TOWNSHIP 5 SOUTH, RANGE 3 WEST, USB&M

- 1. Ute Tribal #17-12, Section 17
- 2. Ute Tribal 21-06, Section 21
- 3. Ute Tribal 28-05A, Section 28
- 4. Ute Tribal 29-11, Section 29
- 5. Ute Tribal 30-01, Section 30

Based on available information received on <u>June 26 and July 13, 1996</u>, we cleared the proposed location in the following areas of environmental impact.

YES	_XX	NO	Listed threatened or endangered species
YES	XX	NO	Critical wildlife habitat
YES	XX	NO	Archaeological or cultural resources
YES		NO	Air quality aspects (to be used only if project is in o adjacent to a Class I area of attainment
YES		NO	OTHER (If Necessary)

COMMENTS: The Ute Tribe Energy & Minerals is recommending the following criteria to be adhered during all phases of construction activities.

- 1. The Ute Tribe Energy & Minerals Department is to be notified 48 hours prior to construction.
- 2. Petroglyph Operating Company, Corporation will assure the Ute Tribe that any/all contractor/sub-contractors have acquired a Tribal Business License and have an Access Permit prior to construction.
- All vehicular traffic, personnel movement, construction and restoration operations should be confined
 to the areas examined, as referenced in report, and to the existing roadways and/or evaluated access
 routes.
- 4. All recommendations of the Bureau of Indian Affairs combined site specific Environmental Analysis report shall be strictly adhered, during and after construction.
- 5. All personnel should refrain from collecting artifacts and from disturbing any significant cultural remains from subsurface deposits be exposed or identified during construction.
- 6. The Personnel from the Ute Tribe Energy & Minerals Department should be consulted should cultural remains from subsurface deposits be exposed of identified during construction.
- 7. Upon completion of Application for Permit to Drill and Right-of-way, the Ute Tribe Energy & Minerals Resource Department will be notified by Petroglyph Operating Company. Corp. so that a Tribal Technician can verify Affidavit of Completion.

FA dated 8/5/96 attached

SITE SPECIFIC ENVIRONMENTAL ANALYSIS

1.0 PROPOSED ACTION

Petroglyph Operating Co., Inc. is proposing to drill oil well #21-06, and construct approximately 1320 feet of steel surface production pipeline, and approximately 1320 feet of access road..

2.0 ALTERNATIVE ACTIONS

- A. ALTERNATIVE CONSIDERED: The proposed action is the preferred alternative.
- B. NO ACTION: Under the no action alternative the proposed action would not be implemented.
- C. OTHER: NA

3.0 PERMITTEE/LOCATION

- A. Permittee- Petroglyph Operating Co., Inc.
- B. Date 8-14-96
- C. Well number- 21-06
- D. Right-of-way-Pipeline R\W approx.1320 feet, access road 1320 feet.
- E. Site location- SENW, Section 21, T5S, R3W, USB&M.

4.0 SITE SPECIFIC SURVEY

A. SITE DESCRIPTION

- 1. Elevation (feet) 6335
- 2. Annual precipitation (inches) 8-12
- 3. Topography- rolling hills
- 4. Soil- The soil texture is (0 to 6") gravely shale loam with moderate permeability.

B. VEGETATION

- 1. Habitat type is upland shrub.
- 2. Percent Ground Cover- estimated to be 40%.
- 3. Vegetation consists of approximately 20% grasses, 70% shrubs, 10% forbs. The main variety of grasses are squirrel tail, Indian ricegrass, poa, needle & thread, bluebunch wheat, galleta, and blue grama. Forbs are astragalus, mustard, lambs quarter, globemallow, buck wheat, & annuals. Shrubs consist of black sagebrush, prickly pear, shadscale.

- 4. Observed Threatened & Endangered species: None.
- 5. Potential For Threatened & Endangered species: Slight
- 7. Observed Noxious Weeds: None

8. AFFECTED ENVIRONMENTAL

1. There are no surface damages as a result of the initial survey.

4.1 WILDLIFE

A. POTENTIAL SITE UTILIZATION

- 1. Big Game-The area is used throughout the year by mule deer, elk, and antelope.
- 2. Small Game-The area is used by cottontail rabbit.
- 3. Raptor- Various species of raptors use this area for habitat. Raptors which are observed using the area are Golden eagles, Redtail hawk, & Kestrel. Ferruginous hawk hunt in the area and there is an active nest located approximately 2200 feet west of this project area in Section 21, T5S, R3W, USB&M.
- 5. Non-Game Wildlife- Animal species which have been observed using this area are black tail jack rabbit, coyote, fox, badger, and various species of reptiles, and song birds.
- 6. Threatened & Endangered Species: No T&E species are reported using the area of this project.

4.2 PRESENT SITE USE

A. USAGE

	acres
Rangeland	3.00
Irrigable land	0
Woodland	0
Non-Irrigable land	3.00
Commercial timber	0
Floodplain	0
Wetland	0
Riparian	0
Other:	0

4.3 CULTURAL RESOURCES

A. CULTURAL SURVEY

Cultural Resource Surveys were performed by James A.

Truesdale, an Independent Archaeologist.

5.0 ENVIRONMENTAL IMPACTS

A. SURFACE ALTERATIONS

		acres
1.	Access road	0.90
2.	Well site	1.26
3.	Pipeline right-of-way	0.90
4.	Total area disturbed	3.00

B. VEGETATION/LANDSCAPE

- 1. Production loss (AUM's)/year: 0.21
- Permanent scar on landscape: Yes x No
- 3. Potential impacts to Threatened & Endangered species: Yes No X

C. SOIL/RANGE/WATERSHED

There will be an increase in soil erosion from wind and water. There will not be any possible point source of water pollution.

The area is presently used as rangeland. In recent years the area has been permitted for livestock grazing, but at the present time no permits have been issued for the area. This project will reduce livestock grazing by approximately 0.21 AUM/year.

The area is not used as irrigated cropland and a water right has not been designated for the area.

D. WILDLIFE/THREATENED & ENDANGERED SPECIES

There will be an insignificant reduction of wildlife habitat and grazing for livestock. There will also be an increase in wildlife disturbance and poaching resulting from the additional traffic and people using the area.

There are no known impacts to Threatened or Endangered species but is important habitat for the Ferruginous hawk. The area is important winter range for big game.

Ferruginous Hawks use this area for nesting and hunting. There is an nest approximately 2200 feet west of the wellsite in Section 21 which is an alternate nest to an active nest.

6.0 MITIGATION STIPULATIONS

A. VEGETATION/LANDSCAPE

- 1. Before the site is abandoned the company will be required to restore the well site and right-of-ways to near their original state. The disturbed area will be reseeded with desirable perennial vegetation.
- Noxious weeds will be controlled on the well site and rights-of-way. If noxious weeds spread from the project area onto adjoining land, the company will also be responsible for their control.

B. SOILS/RANGE/WATERSHEDS

- 1. Soil erosion will be mitigated by reseeding all disturbed areas.
- 2. The pipeline will be constructed to lay on the soil surface, and the right-of-way will not be bladed or cleared of vegetation.

Where pipelines are constructed parallel to roads they may be welded on the road and then lifted from the road onto the right-of-way.

Where pipelines do not parallel roads but cross country between stations, they shall be welded in place at wellsites or on access roads and then pulled between stations with a suitable piece of equipment. Traffic will be restricted along these areas so that the pipeline right-of-way will not be used as an access road.

- 3. An open drilling system will be used. Reserve pits will be lined with impervious synthetic liners. Prior to backfilling the reserve pit all fluids will be pumped from the pit into trucks and hauled to approved disposal sites. When the reserve pits are backfilled the surplus oil and mud, etc will be buried a minimum of 3.0 feet below the surface of the soil.
- 4. A closed production system will be used. Production fluids will be contained in leak proof tanks. All production fluids will be disposed of at approved disposal sites. The indiscriminate dumping of production fluids on roads, wellsites or other areas will not be allowed.
- 5. Although the access roads have a 30 foot right-ofway the bladed area of the road will be limited to

21 feet in all areas except where deep cuts and fills are required, sharp turns are required, or at the intersections with other roads.

- 6. The access road & pipeline which is presently staked shall be changed. A new access road shall be staked & constructed leading from the Ute Tribal 2\$-11 to the 21-Q6. The reason for making this change is to reduce traffic flowing past the Ferruginous hawk nest located in section 20.
- C. WILDLIFE/VEGETATION/THREATENED & ENDANGERED SPECIES

Because the wellsite is located less than 1/2 mile but more than 1/4 mile from a Ferruginous hawk nest this wellsite will be constructed and drilled between August 15 and February 15.

D. CULTURAL RESOURCES

Cultural resource surveys were performed by James A. Truesdale. The consultant recommends clearance of the project as it is presently staked.

E. UTE TRIBAL REGULATIONS

- (1). Prior to commencing surveys or construction on the U&O Indian Reservation the operator, and any of its subcontractors, shall acquire access permits and business permits from the Ute Indian Tribe.
- (2). Prior to the commencement of construction, the operator shall notify the Ute Tribal Department of Energy and Minerals of the date construction shall begin.

7.0 UNAVOIDABLE ADVERSE IMPACTS

A. SURFACE ALTERATIONS

None of the adverse impacts listed in 5.0 above can be avoided in a practical manner except those which are mitigated in item 6.0 above and those specified in BLM's 13 point surface use plan.

- B. RELATIONSHIP BETWEEN SHORT-TERM USE OF THE ENVIRONMENT VS LONG TERM PRODUCTIVITY.
 - 1. Short Term: (Estimated 20 years) A total loss of production on the land and the associated environmental impacts will continue to influence the surrounding area for the productive life of the well.
 - Long Term: Standard policies provide for rehabilitation of wellsite and rights-of-ways.

After the land is rehabilitated, it is not expected to return to its original productive capability. Normally, there will be a permanent scar left on the landscape.

C. IRREVERSIBLE AND IRRETRIEVABLE COMMITMENT

Oil and Gas are non-renewable resources, once they have been removed they can never be replaced.

8.0 CUMULATIVE IMPACTS

A. FULL DEVELOPMENT

Each additional well drilled for development increases the soil erosion potential, reduces wildlife habitat and grazing, increases potential soil and geologic pollution resulting from salt loading, reduces the soil's potential to recover, and increases the potential of water pollution from produced waters and hydro-carbons. Therefore, strict conformance with the mitigation measures and recommendations in this document is emphasized to minimize the adverse environmental impacts.

9.0 NEPA COMPLIANCE

A. RESEARCH/DOCUMENTATION

Based on available information, 10-17-96, the proposed location in the following areas of environmental impacts has been cleared:

<u>_X</u>	Yes	No	Listed Threatened & Endangered
			species
<u>X</u> _	Yes	No	Critical wildlife habitat
_X	Yes	No	Historical and cultural resources

10.0 REMARKS

A. SURFACE PROTECTION/REHABILITATION

All essential surface protection and rehabilitation requirements are specified above.

11.0 RECOMMENDATIONS

A. APPROVAL/DISAPPROVAL

We recommend approval of the proposed action as outlined in item 1.0 above.

10-17-96

Representative - BIA Land Operations, Uintah and Ouray Agency

12.0 DECLARATION

A. APPROVAL

It has been determined that the proposed action is not a federal action significantly affecting the quality of the environment as it would require the preparation of an environmental impact statement in accordance with Section 102 (2) (c) of the National Environmental Policy Act of 1969 (42 USC 4331) (2) (C).

10/18/96

Superintendent,

Uintah and Ouray Agency

14.0 CONSULTATION

A. REPRESENTATIVES/ORGANIZATION

Dale Thomas- BIA
Ed Trotter-Petroglyphs
Lonnie Nephi-UTEM
Stan Olmstead-BLM

B:\EAPetro.216

CONDITIONS OF APPROVAL APPLICATION FOR PERMIT TO DRILL

Com	pany/Ope	rator: Petroglyph Operating Company
Well	Name &	Number: <u>Ute Tribal 21-06</u>
API	Number:	43-013-31731
Leas	e Number	: <u>14-20-H62-3516</u>
Loca	tion: <u>SE</u>	NW Sec. <u>21</u> T. <u>5S</u> R. <u>3W</u>
		NOTIFICATION REQUIREMENTS
Location Constructio	n -	at least forty-eight (48) hours prior to construction of location and access roads.
Location Completion	ı -	prior to moving on the drilling rig.
Spud Notice	-	at least twenty-four (24) hours prior to spudding the well.
Casing String and Cementing	-	at least twenty-four (24) hours prior to running casing and cementing all casing strings.
BOP and Related Equipment Tests	-	at least twenty-four (24) hours prior to initiating pressure tests.
First Production Notice	-	within five (5) business days after new well begins, or production resumes after well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice

to Drill and Surface Use Program.

CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas Orders, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative by the operator to insure compliance.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. <u>DRILLING PROGRAM</u>

1. <u>Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered</u>

Report <u>ALL</u> water shows and water-bearing sands to Tim Ingwell of this office **prior to** setting the next casing string or requesting plugging orders. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a **2M** system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

COA's Page 3 of 9 Well: Ute Tribal 21-06

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint.

If conductor pipe is set it will be cemented to surface. If drive pipe is used it will be pulled prior to cementing surface casing.

As a minimum, the usable water and oil shale resources shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the base of the Usable Water Zone, identified at \pm 847 ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vaporproof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) will be run from the production casing shoe to \pm 647 ft. and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

COA's Page 4 of 9 Well: Ute Tribal 21-06

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

The Vernal District Office shall be notified, during regular work hours (7:45 a.m.-4:30 p.m., Monday through Friday except holidays), at least 24 hours **prior** to spudding the well.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

<u>Immediate Report</u>: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication, not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

COA's Page 5 of 9 Well: Ute Tribal 21-06

A schematic facilities diagram as required by 43 CFR 3162.7-5 (b.9. d.), and shall be submitted to the appropriate District Office within sixty (60) days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (b. 4).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries. Tests for meter accuracy will be conducted following initial installation and at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

COA's Page 6 of 9 Well: Ute Tribal 21-06

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approval or notification is necessary, please contact one of the following individuals:

Wayne Bankert (801) 789-4170 Petroleum Engineer

Ed Forsman (801) 789-7077

Petroleum Engineer

Jerry Kenczka (801) 789-1190

Petroleum Engineer

BLM FAX Machine (801) 781-4410

COA's Page 7 of 9 Well: Ute Tribal 21-06

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

- Unused fracturing fluids or acids
- Gas plant cooling tower cleaning wastes
- Painting wastes
- Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spend solvents, spilled chemicals, and waste acids
- Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste
- Refinery wastes
- Liquid and solid wastes generated by crude oil and tank bottom reclaimers
- Used equipment lubrication oils
- Waste compressor oil, filters, and blowdown
- Used hydraulic fluids
- Waste solvents
- Waste in transportation pipeline-related pits
- Caustic or acid cleaners
- Boiler cleaning wastes
- Boiler refractory bricks
- Incinerator ash
- Laboratory wastes
- Sanitary wastes
- Pesticide wastes
- Radioactive tracer wastes
- Drums, insulation and miscellaneous solids.

COA's Page 8 of 9 Well: Ute Tribal 21-06

SURFACE USE PLAN OF OPERATION

Conditions of Approval (COA's)

- 1. The Ute Tribe Energy and Minerals Department is to be notified 48 hours prior to construction.
- 2. Petroglyph Operating Company will assure the Ute Tribe that any/all contractors/subcontractors have acquired a Tribal Business License and have an Access Permit prior to construction.
- 3. All vehicular traffic, personnel movement, construction and restoration operations should be confined to the areas examined, as referenced in report, and to the existing roadways and/or evaluated access routes.
- 4. All recommendations of the Bureau of Indian Affairs, combined site specific Environmental Analysis (EA) report shall be strictly adhered, during and after construction.
- 5. All personnel should refrain from collecting artifacts and from disturbing any significant cultural remains from subsurface deposits at are exposed or identified during construction.
- 6. The personnel from the Ute Tribe Energy & Minerals Department should be consulted, should cultural remains from subsurface deposits be exposed or identified during construction.
- 7. Upon completion of Application for Permit to Drill and Right-of-way, the Ute Tribe Energy & Minerals Resource Department will be notified by Petroglyph Operating Company so that a Tribal Technician can verify Affidavit of Completions.

Mitigation stipulations from the combined site specific Environmental Analysis.

- 1. Before the site is abandoned the company will be required to restore the well pad and access road to near their original state. The disturbed area will be reseeded with desirable perennial vegetation.
- Noxious weeds will be controlled on all well sites and rights-of-way. If noxious weeds spread
 from the well sites or rights-of-way onto adjoining land, the company will also be responsible for
 their control.
- 3. The pipeline will be constructed to lay on the soil surface, and the right-of-way will not be bladed or cleared of vegetation.

Where pipelines are constructed parallel to roads they may be welded on the road and then lifted from the road onto the right-of-way.

Where pipelines do not parallel roads but cross country between stations, they shall be welded in place at wellsites or on access roads and then pulled between stations with a suitable piece of equipment. Traffic will be restricted along these areas so that the pipeline right-of-way will not be used as an access road.

COA's Page 9 of 9 Well: Ute Tribal 21-06

- 4. An open drilling system shall be used. Reserve pits will be lined with impervious synthetic liners. Prior to backfilling the reserve pit all fluids will be pumped from the pit into trucks and hauled to approved disposal sites. When the reserve its are backfilled the surplus oil and mud, etc will be buried a minimum of 3.0 feet below the surface of the soil.
- 5. A closed production system will be used. Production fluids will be contained in leak proof tanks. All production fluids will be disposed of at approved disposal sites. The indiscriminate dumping of production fluids on roads, well sites or other areas will not be allowed.
- 6. Although the access roads have a 30 foot right-of-way the bladed area of the road will be limited to 21 feet in all areas except where deep cuts and fills are required, sharp turns are required, or at the intersections with other roads.
- 7. The access road and pipeline which is presently staked shall be changed. A new access road shall be staked and constructed leading from the Ute Tribal 21-11 to the 21-06. The reason for making this change is to reduce traffic flowing past the Ferruginous hawk nest located in Section 20.
- 8. Because the wellsite is located less than 1/2 mile but more than 1/4 mile from a ferruginous hawk nest this wellsite will be constructed and drilled between August 15 and February 15.
- 9. Prior to the commencing surveys or construction on the U&O Indian Reservation the operator and any of it's subcontractors, shall acquire access permits and business permits from the Ute Indian Tribe.
- 10. Prior to the commencement of construction, the operator shall notify the Ute Tribal Department of Energy and Minerals of the date construction shall begin.

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: PETROGLYPH OPERATING
Well Name: UTE TRIBAL 21-06
Api No. 43-013-31731
Section 21 Township 5S Range 3W County DUCHESNE
Drilling Contractor UNION
Rig #: 12_
SPUDDED:
Date: 11/13/96
Time:
How: ROTARY
Drilling will commence:
Reported by: D. INGRAM
Telephone #:
Date: 11/18/96 Signed: JLT

STARE OF MIAN DIVISION OF UIL, GAS AND MINING ENTITY ACTION FORM - FORM 6

(3/89)

Petroglyph Operating Co., Inc. OPERATOR P.O. Box 1839 ADDRESS

67504-1839

Hutchinson, KS

OPERATOR ACCT. NO. 1 3800

			<u> </u>									
40110H 3000	CURRENT	NEH	AP (HUNDER	WELL NAME				WELL	LOCATIO	<u> </u>	SPUO	FEFFER
CODE	ENTITE NO.	ENTITY NO.				QQ	sc	TP	RG	COUNTY	DATE	EFFECTIVE
A	99999	12049	43-013-31731	Ute Tribal	•	SENW	21	5 S	3W	Duchesne	11-13-96	
WELL 1 C	OMMENTS:					·	·		·	<u> </u>	_1	<u> </u>
		Ute Tri	bal 21-06 will	be a tank battery.	Enlity	addeo	1	30-9 <i>6</i>	. Lee			
											T	
WELL 2 C	Oring HTS:					·	<u> </u>	<u> </u>	!	<u>!</u>	J	<u> </u>
	· · · · · · · · · · · · · · · · · · ·											
]		T	T
WELL 3 C	Denoch C .	<u> </u>				<u> </u>		L	<u> </u>			
	·// (
		<u> </u>	<u> </u>			li		,	Г			
		<u> </u>										
HELL 4 C	OFFICE ITS:					·		·	·	<u> </u>	_1	<u> </u>
•												
			· · · · · · · · · · · · · · · · · · ·			 						
											_	
WELL 5 LI	1 06001113 S ·	<u> </u>	1	· · · · · · · · · · · · · · · · · · ·		<u>[</u>]		<u></u>	<u> </u>		<u> </u>	
ACTION C	ODES (See i	nstructions	on back of form)									
Α -	– Establish	new entity	for new well (sin ting entity (group	gle well only)	-					Dema	K. Kel	ℓ
C	- Re-assign	well from	one existing entit	y to another existing entit			7 E N	\mathcal{J}		Signature D		ell
τι · Έ	- Kemassign - Other (ex	meri rrom plaio in co	one existing entit mments section)	y to a new entity		***		$\parallel \parallel$		Operation	s Coordina	
HOTE: U	se Comment	section to	explain why each /	action Code was selected) Det 8	7 100	33 1/1	IJ		-	01 , 722-25	Date 31
				· ·	1 5-56	<i>)</i>	/U	ı		Hone No.	1 . 2 2 2 2 3	

FORM 7		STATE OF UTAH DIVISION OF OIL, GAS AND MINI	ING DECENVE	
	REPORT OF	WATER ENCOUNTERED D	URING DRILLING	サ
API numb	A .		DIV. OF OIL, GAS & MININ	l G
Address:	P.O. Box 1839 Hutchinson, KS 67		Phone: (316) 665–8500	
4. Drilling co	ntractor: <u>Union</u> DR	Mag		
Address:	Buckhauser,		800-351-3839 Phone: <u>304-472-4618</u>	7
5. Water enc	ountered (attach additional pa	ges as needed):		
	DEPTH TO	VOLUME (FLOW RATE OR HEAD)	QUALITY (FRESH OR SALTY)	
±	7.33	1/2" Stream	satt	
	2550	1/2 StReam	5414	
				•
6. Formation	tops:			

If an analysis	has been made of the water e	encountered, please attach a copy	of the report to this form.	
		omplete to the best of my knowled	dge. Date: 11-29-96	
Name & Sign	\mathcal{L}	Deana Bell	Title: Operations Coordina	<u>fu</u>

Form 3160-4 (November 1983) (formerly 9-330)

DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

SUBMIT IN DUPLICATE*
(ther inions on e side)

Form approved. Budget Bureau No. 1004-0137 Expires August 31, 1985

5. LEASE DESIGNATION AND SERIAL NO. 14-20-H62-3516


		OR RECO		ION	REPORT	A١	ID LOC	3 *	Ute In	n. ALL Idiar	OTTEE OR TRIBE NAME
							14-20-				
WEW X	WORK DO	EEP DEFG	DIF EES	va.	Other				. FARM OR	LEASE	E NAME
2. NAME OF OPER	Petroglyph Operating Company, Inc.								Ute Tr		<u> </u>
3. ADDRESS OF OF		1000 77			C C C C C C C C C C C C C C C C C C C	10			21-06		
4		x 1839, H		•							OL, OR WILDCAT
4. LOCATION OF W					ry State requi	remen	te)*		Antelo		
At top prod. is	nterval reported t	& 2128' F	WL, SE	NW	TIAI		MITIA	'	OR AREA	l .	OR BLOCK AND SURVEY
At total depth		TVILL)	-וווי		MALE	III	MIIM	-	Sec 21	.–T58	5-R3W
	6200' RID) • • • • • •	14. PE	RMIT NO.	Com	DATE	183 (£ D	<u> </u> _	2. COUNTY	OR	13. STATE
			ŀ	013-3					PARISH Duchesn	ne	Utah
15. DATE SPUDDED 11-13-96	16. DATE T.D.		TE COMPL. 1-3-97	(Ready t	o prod.) 18	. ELE	6332	RKB. RT.	GR, ETC.)	19.	ELEV. CASINGHEAD
20. TOTAL DEPTH, MI	21. PL	UG. BACK T.D., MD	* TVD 22	. IF MUL	TIPLE COMPL.		23. INTE		ROTARY TO	LS	CABLE TOOLS
6200'		6169'	<u> </u>				- BRILL	ED BY			<u>_</u>
24. PRODUCING INT		S COMPLETION—TO	ор, воттом.	NAME ()	*(GVT QMA DM	,				2	5. WAS DIRECTIONAL SURVEY MADE
Green Riv	ær										
26. TYPE ELECTRIC	/ ***	RUN								27. ₩	VAS WELL CORED
CNL, AIT	4-17		VNC PECO								
CABING SIZE	WEIGHT, LB.				ort all strings I.E SIZE	862 0		NTING REC	ORD		AMOUNT PULLED
8-5/8	24#	281		12	-1/4	150	sx G N	eat,2%	CaC12	!	
5-1/2	15.5#	6203		7	-7/8		sx Hig			10-0	RFC
	_										
29.	!	LINER RECORD)		<u></u>	1	30.	TUE	ING RECO	ORF)	<u> </u>
3218	TOP (MD)	BOTTOM (MD)	SACKS CE	MENT"	SCREEN (MI	<u>,, </u>	SIZE	-	TH BET (M		PACKER SET (MD)
			-				2-7/8		558		
31. PERFORATION RE	CORD (Interval. s	ize and number	1								
5438-46 (33		4706-12 (2			DEPTH INT						EEZE, ETC.
5412-16 (17		4698-4700	(9 sho	ts)	5412-46						6100# prop
5112-20 (33	·- / 1	A semen	No. of the last	Security as a	5112-20						4700# prop
4946-49 (13 4854-63 (37			1 - Al		4046-49						3300# prop
	snots) V	STAME PE			4854-63						4500# prop
33.* DATE FIRST PRODUCT				PROD	CTION 46	98-4	712 6	934 ga	l fluid	; 24	1800# prop
1-8-97		ping, 2-1/2	2 x 1-3	/4 x	16 40 ri	ng I	pe of pump A)	ehu:	t-in)	s (Producing or
DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N.		OIL-BBL.		GAS-MCF		ATER—BBC	prod	UCING BATIO
1-11-97	24	<u> </u>	TEST P		42	ĺ	0	1	53		
FLOW, TURING PRESS.	CASING PRESECT	CALCULATED 24-HOUR BAT	C10	31	GAS	CF.	· w	ATERHBI	.	016 61	RAVITY-API (CORE.)
34. DISPOSITION OF G	925 AB (Bold, weed for	fuel, vented, etc.)		7 100	O TO SI	77 9	TO CAN				
sold; used	d for fuel		Ŋ	D) JE	((;)5,)	<u> </u>	[다]]))	T	Bave S		
35. LIST OF ATTACH	MINTS						- <i>\</i>	-			
36. I hereby certify	that the forestin	og and attached to	formation) _)	JAN 31	<u> 199</u>	/	L			
///		CRA		ì			1	from all	vailable re	cords:	
SIGNED JUL	runa	+. Duyu	TIT		roductio		alyst MillinG		DATE	_1	-28-97
•				127 V. W	,			-			

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill-stem, tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and GEOLOGIC MARKERS recoveries): FORMATION BOTTOM TOP DESCRIPTION, CONTENTS, ETC. TOP NAME TRUE VERT. DEPTH MEAS, DEPTH 4524 X Marker 4666 Douglas Creek 5040 B Limestone 5614 Castle Peak 6026 Basal Carbonate

March 12, 1997

Vicky Dyson State of Utah Division of Oil, Gas & Mining 1594 W. North Temple, Ste.1210 Salt Lake City, UT 84114

Ms. Dyson:



VIA UPS

* Commental

Enclosed please find the logs listed below for the wells located in Duchesne County, Utah.

Well Name	<u>Log</u>	_
Ute Tribal 21-06	CNL, AIT 43013 31731	55 3W 21
Ute Tribal 21-11	CNL, AIT	-
Ute Tribal 21-12	CNL, AIT	
Ute Tribal 21-14	CNL, AIT	

Please hold these in confidence as permitted in division guidelines.

I have received your request for logs on the Ute Tribal 21-03, Ute Tribal 21-04, and Ute Tribal 21-10. These logs are being copied and will be forwarded to you as soon as possible. If you need further information, please do not hesitate to call me at 316-665-8500.

Sincerely,

April Menzies

Petroleum Engineering/Geology Technician

april Menzies

Form 3160-5 (June 1990)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

Budget Bureau No. 1004-0135	
 Expires March 31, 1993	

FORM APPROVED


5. Lease Designation and Serial No.

14-20-H62-3516

SUNDRY NOTICES /	AND REPORTS ON WELLS	If Indian, Allottee or Tribe Name
Do not use this form for proposals to drill or to deepe	Ute Indian Tribe	
Use "APPLICATION FOR PERMIT"		
SUBMIT	IN TRIPLICATE	7. If Unit or CA, Agreement Designation 14-20-H62-4650
1. Type of Well Oll Gas Well Well Other		8. Well Name and No.
2. Name of Operator		Ute Tribal 21-06
Petroglyph Operating Company, Inc.		9. API Well No.
3. Address and Telephone No.		43-013-31731
P.O. Box 1839, Hutchinson, KS 67504-183	99; (316) 665-8500	10. Field and Pool, or Exploratory Area
4. Location of Well (Footage, Sec., T., R., or Survey Description)		Antelope Creek
1980' FSL & 2180' FWL		11. County or Parish, State
SE NW 21-T5S-R3W		Duchesne County, UT
:		
12. CHECK APPROPRIATE BOX(s) 1	TO INDICATE NATURE OF NOTICE	, REPORT, OR OTHER DATA
TYPE OF SUBMISSION	TYPE OF ACT	
Notice of Intent	Abendonment	Change of Plans
	Recompletion	New Construction
Subsequent Report	Plugging Back	Non-Routine Fracturing
	Casing Repair	Water Shut-Off
Final Abandonment Notice	Altering Casing	Conversion to Injection
	Other	Dispose Water
		(Note: Report results of multiple completion on Well
·		
		Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Petroglyph Operating Company, Inc. has submitted an application for a UIC permit to convert the Ute Tribal 21-06 from a producing well to an injection well under the EPA Area Permit #UT2736-00000 within the Antelope Creek Waterflood Project Area located in Duchesne County, Utah.



14. I hereby certify that the foregoing Signed	is true and correct. Title Geo/Petro Engineer	ring Tech Date 7-17-97
(This space for Federal or State	official use)	
Approved by	Title	Date
Conditions of Approval, if any:		
Title 18 U.S.C. Section 1001, makes	It a crime for any person knowingly and willfully to make to any department of	or agency of the United States any false, fictitious or fraudulent statements
or representations as to any matter in		,

Form 3160-5 (June 1990)


UNITED STATES

Budget Bureau No. 1004-0135

FORM APPROVED

DEDASTMENT	' OF THE INTERIOR	Expires March 51, 1450	
	DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT		
SUNDRY NOTICES A Do not use this form for proposals to drill or to deepen of Use "APPLICATION FOR PERMIT"	ND REPORTS ON WELLS or reentry to a different reservoir.	6. If Indian, Allottee or Tribe Name Ute Indian Tribe	
SUBMIT I	N TRIPLICATE	7. If Unit or CA, Agreement Designation 14–20-H62-4650	
1. Type of Well Oil Gas Well Other		8. Well Name and No. Ute Tribal 21-06	
Name of Operator Petroglyph Operating Company, Inc.		9. API Well No. 43-013-31731	
3. Address and Telephone No. P.O. Box 1839, Hutchinson, KS 67504-183	9; (316) 665-8500	10. Field and Pool, or Exploratory Area Antelope Creek	
4. Location of Well (Footage, Sec., T., R., or Survey Description) 1980' FNL & 2180' FWL SE NW Section 21-T5S-R3W	•	11. County or Parish, State Duchesne County, UT	
OUTOV APPROPRIATE BOX(s)	TO INDICATE NATURE OF NOTICE, R	EPORT, OR OTHER DATA	
TYPE OF SUBMISSION	TYPE OF ACTION		
Notice of Intent	Abandonment Recompletion	Change of Plans New Construction	
Subsequent Report	Plugging Back Casing Repair	Non-Routine Fracturing Water Shut-Off	
Final Abandonment Notice	Altering Casing Other Commence in the	Conversion to Injection Dispose Water	
	_	(Note: Report results of multiple completion on Well	
		Completion or Recompletion Report and Log form.)	

Further to BLM & EPA approval (Permit #UT2736-04388), enclosed are copies of the MIT and Job Summary. Injection commenced on 9/21/97.



4. I hereby certify that the lifegoing is due and correct Signed 1 ally Jumes	Title Petroleum Engineering Tech	Date June 9, 1998
(This space for Federal or State official use) Approved by	Title	Date
Conditions of Approval, if any:		
Title 18 U.S.C. Section 1001, makes it a crime for any person kn	owingly and willfully to make to any department or agency of the Ur	nited States any false, fictitious or fraudulent statements
or representations as to any matter in its jurisdiction.		

Mechanical Integrity Test


Casing or Annulus Pressure Test for Well
U.S. Environmental Protection Agency

UT2736-04388

Underground Injection Control Program. UIC Implementation Section, 8WM-DW 999 13th Street, Suite 500, Denver, CO 80202-2466
This form was printed on 06/10/1996.

EPA Witness: Date <u>8 /zz / 97</u>
Test conducted by: Gens Searls
Others present:
UTE TRIBAL 21-06 as of ANTELOPE CREEK SE NW Sec. 21-T5S-R3W Petroglyph Operating Company, Inc., Hutchinson, KS Op ID PTG01
Last MIT: No record / / Max Allowed Press psig 199 Max Reported Press psig
Is this a regularly scheduled test? [] Yes [] No Initial test for permit? [] Yes [] No Test after well rework? [] Yes [] No
Well injecting during test? [4] NO [] YES EP
Initial casing/tubing annulus pressure //75 psig Does the annulus pressure build back up? [] Yes [] No

TUBING PRESSURE						
Initial	0	psig		psig		psig
End of Test	0	psig		psig		psig
CASING/TUBING ANNULUS PRESSURE						
Time	Te	st #1	Те	st #2	Ţ.	'est #3
0 min	1/75	psig		psig		psig
5	1175					
10	1175	·				
15 min	1/75					
20	1175					
25	1175					
30 min	1175					
. 24 Hes.	1/75					
Result (circle)	Pass	Fail	Pass	Fail	Pass	1 :11

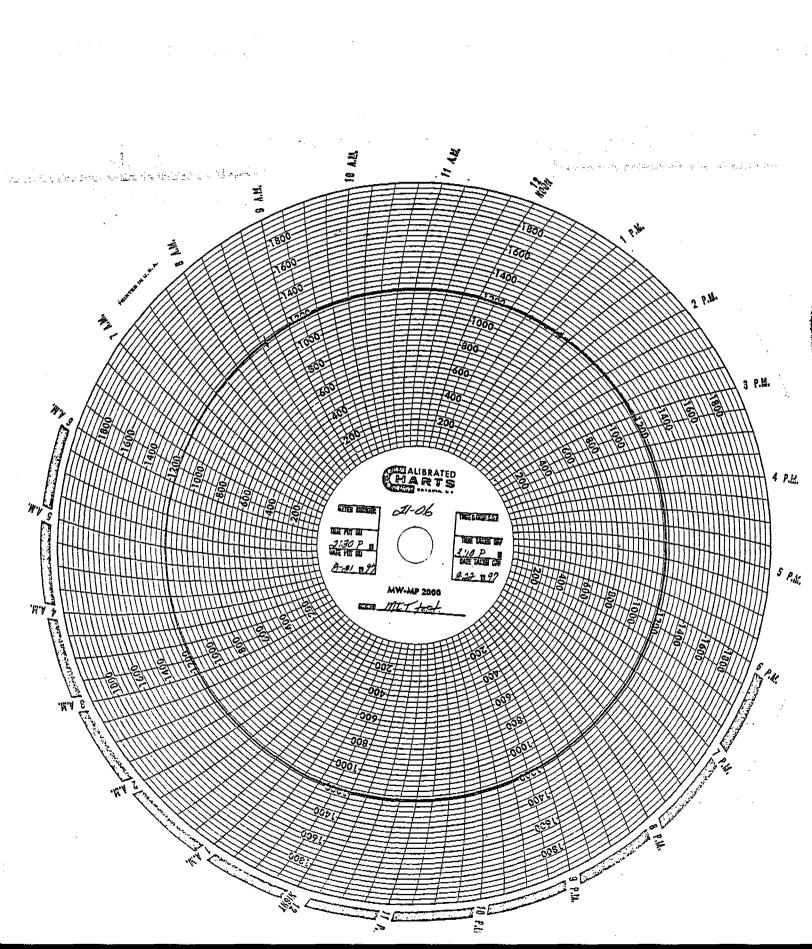

WORKOVER REPORT

6/8/98

County, St.:

Petroglyph Operating Co., Inc.

Petroglyph Operating Company, Inc. Operator:

Elevation:

6332

Ute Tribal 21-06 Lease:

6342

43-013-31731 **API #:**

Property: 50105

AFE/EPE Number:

40037

21 - 5 S - 3 W Location:

UT Duchesne

Event Type: convert to injector

Activity Date

Activity Description

8/19/97

SITP 100psi. SICP 250psi. 7a.m. Vent casing. Cont. single down tubing. Swabbing in oil pump 10bbls, to control still gassing up casing. Pump 15bbls, down. Annulus & let die. Cont. POOH single down tubing blew in. Load well bore with 94bbls, prod. water pumping down tubing & circ, 90bbls, to displace out gas & oil. Lost 120bbls, with circ. Finish single down 2 7/8" tubing string. Move 2 3/8" tubing to well head. Cross over to 2 3/8" equip. tally & single in 142jts. 2 3/8" tubing. POOH breaking each jt. to apply teflon thread compound. MU mtn. states Hydro One pkr. & start RIH. SWIFN. 7:30p.m.

8/18/97

SITP 100psi. SICP 500psi. 7:00a.m. Rd on 07-09. Clean rig tank & loc. Move out & road rig & equip. to 21-06. MIRU while rd. surface equip. & pull pump off seat, vent casing. Flush rod string with 30bbls. prod. water @ 1½bpm @ 210° @ 500 to 0 psi. Recover 15bbls. oil via thermal expansion. Single down 77 slick 7/8" rods flush with 20bbls. prod. water. Single down 75 slick 3/4" rods. Flush with 20bbls. prod. water. Finish single down 68 slick 3/4" rods. LD insert pump. Crossover to 2 7/8" tubing equip. ND & remove tubing flange. Rise TAC @ ± 4662'. Strip on BOPE & NU. Start single down 2 7/8" tubing. SWIFN 7:30 p.m.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES

1	5. LEASE DESIGNATION AND SERIAL NUMBER: 1420H623516				
SUNDRY	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: Ute Indian Tribe				
Do not use this form for proposals to drill no drill horizontal lar	7. UNIT OF CA AGREEMENT NAME: 1420H62450				
1. TYPE OF WELL OIL WELL	GAS WELL OTHER W	Vater Injection Well	8. WELL NAME and NUMBER: Ute Tribal 21-06 Inj		
2. NAME OF OPERATOR: Petroglyph Operating Corr	pany Inc.		9. API NUMBER: 4301331731		
3. ADDRESS OF OPERATOR:	<u> </u>	PHONE NUMBER:	10. FIELD AND POOL, OR WILDCAT:		
P. O. Box 607 4. LOCATION OF WELL	Roosevelt STATE Ut ZIP 8	34066 (435) 722-5304	Antelope Creek		
FOOTAGES AT SURFACE: 1980' F	FNL, 2180' FWL		COUNTY: Duchesne		
QTR/QTR, SECTION, TOWNSHIP, RANG	GE, MERIDIAN: SENW 21 T5S R	3W	STATE: UTAH		
11. CHECK APPR	ROPRIATE BOXES TO INDICATI	E NATURE OF NOTICE, REPO	RT, OR OTHER DATA		
TYPE OF SUBMISSION		TYPE OF ACTION			
NOTICE OF INTENT	ACIDIZE	DEEPEN	REPERFORATE CURRENT FORMATION		
(Submit in Duplicate)	ALTER CASING	FRACTURE TREAT	SIDETRACK TO REPAIR WELL		
Approximate date work will start:	CASING REPAIR	NEW CONSTRUCTION	TEMPORARILY ABANDON		
6/18/2007	CHANGE TO PREVIOUS PLANS	OPERATOR CHANGE	TUBING REPAIR		
pro-	CHANGE TUBING	PLUG AND ABANDON	VENT OR FLARE		
SUBSEQUENT REPORT (Submit Original Form Only)	CHANGE WELL NAME	PLUG BACK	WATER DISPOSAL		
Date of work completion:	CHANGE WELL STATUS	PRODUCTION (START/RESUME)	WATER SHUT-OFF		
**************************************	COMMINGLE PRODUCING FORMATIONS	RECLAMATION OF WELL SITE	✓ OTHER: well integrity repair		
	CONVERT WELL TYPE	RECOMPLETE - DIFFERENT FORMATION			
DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. The Ute Tribal 21-06 Inj well lost integrity and was shut in on June 15, 2007 due to a tubing or packer leak. Petroglyph Operating Company Inc. will MIRU on 6/18/07 and pull tubing and packer, RIH with new packer and hydrotest tubing. A new MIT will be conducted and sent in as soon as wellwork is completed.					
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY					
NAME (PLEASE PRINT) Steve Wall TITLE Manager					
SIGNATURE Steel DATE 6/18/2007					

(This space for State use only)

RECEIVED
JUN 1 9 2007